


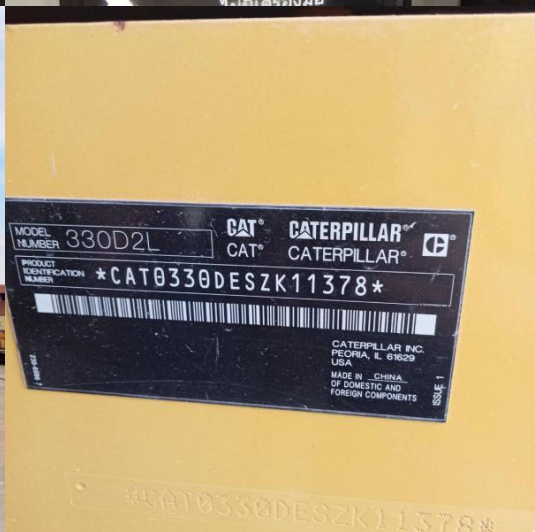

EXCAVATORS

330D2L

Tractafric
equipment

CAT[®]

EXCAVATORS

330D2L

Overview

Contact and information

BY EMAIL

frederique.simmons@tractafric.com

david.guerrey@tractafric.com

BY PHONE

+212 522 438 222

+33 1 71 90 40 50

Key information

BRAND

CAT®

CONDITION

CAT® Certified Used

REFERENCE

BX06518

YEAR

2018

HOURS

5130

LOCATION

THAILAND

VIN

SZK11378

AVAILABILITY

Sold

EXCAVATORS

330D2L

Technical specifications

ENGINE

NET POWER - ISO 9249 193.8 kW

ENGINE MODEL C7.1 Cat

ENGINE POWER - ISO 14396 195 kW

BORE 105 mm

STROKE 135 mm

DISPLACEMENT 7.01 l

HYDRAULIC SYSTEM

MAIN SYSTEM: MAXIMUM FLOW 560 l/min (148 US gal/min)

MAXIMUM PRESSURE: EQUIPMENT 35000 MPa

MAXIMUM PRESSURE - EQUIPMENT - LIFT MODE 38000 kPa

MAXIMUM PRESSURE: TRAVEL 35000 kPa

MAXIMUM PRESSURE: SWING 29800 kPa

SWING MECHANISM

SWING SPEED 11.5 RPM

MAXIMUM SWING TORQUE 110 kNm

WEIGHT

EXCAVATORS

330D2L

Technical specifications

OPERATING WEIGHT	31400 kg
------------------	----------

MAINTENANCE CAPACITIES

FUEL TANK CAPACITY	474 l
--------------------	-------

COOLING SYSTEM	25 l
----------------	------

ENGINE OIL	25 l
------------	------

SWING DRIVE (EACH)	10 l
--------------------	------

FINAL DRIVE (EACH)	5.5 l
--------------------	-------

HYDRAULIC TANK - INCLUDING RESERVOIR	310 l
--------------------------------------	-------

HYDRAULIC TANK	147 l
----------------	-------

DEF TANK	41 l
----------	------

DIMENSIONS

BOOM	HD Reach 6.15 m (20 ft 2 in)
------	------------------------------

STICK	HD Reach 3.2 m (10 ft 6 in)
-------	-----------------------------

BUCKET	HD 1.80 m ³ (2.35 yd ³)
--------	--

SHIPPING HEIGHT: CAB TOP	3060 mm
--------------------------	---------

HANDRAIL HEIGHT	3060 mm
-----------------	---------

SHIPPING LENGTH	10420 mm
-----------------	----------

EXCAVATORS

330D2L

Technical specifications

REAR END SWING RADIUS	3130 mm
-----------------------	---------

COUNTERWEIGHT CLEARANCE	1120 mm
-------------------------	---------

GROUND CLEARANCE	490 mm
------------------	--------

TRACK LENGTH	4860 mm
--------------	---------

TRACK LENGTH TO CENTER OF ROLLERS	3990 mm
-----------------------------------	---------

TRACK GAUGE	2590 mm
-------------	---------

TRANSPORT WIDTH	3390 mm
-----------------	---------

WORKING RANGES AND FORCES

MAXIMUM DIGGING DEPTH	7250 mm
-----------------------	---------

BOOM	HD Reach 6.15 m (20 ft 2 in)
------	------------------------------

STICK	HD Reach 3.2 m (10 ft 6 in)
-------	-----------------------------

BUCKET	HD 1.80 m ³ (2.35 yd ³)
--------	--

MAXIMUM GROUND REACH	10690 mm
----------------------	----------

MAXIMUM CUTTING HEIGHT	10000 mm
------------------------	----------

MAXIMUM LOADING HEIGHT	6940 mm
------------------------	---------

MINIMUM LOADING HEIGHT	2290 mm
------------------------	---------

MAXIMUM FLAT BOTTOM CUT DEPTH OF 2440 MM († 7090 mm	
---	--

MAXIMUM VERTICAL WALL DIGGING DEPTH	5790 mm
-------------------------------------	---------

EXCAVATORS

330D2L

Technical specifications

BUCKET DIGGING FORCE: ISO	179 kN
---------------------------	--------

STICK DIGGING FORCE: ISO	126 kN
--------------------------	--------