


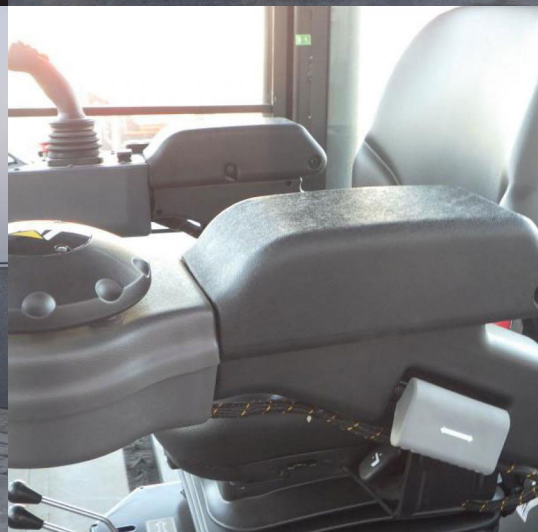

COMPACTORS

CB13

Tractafric
equipment

CAT®

COMPACTORS

CB13

Overview

NEW MACHINE

Rops Cab A/C

2000mm Drum

Control Premium

System 2 Amp/2 freq

Edge Cutter

Roading & Working Lights

Contact and information

BY EMAIL

frederique.simmons@tractafric.com

david.guerrey@tractafric.com

BY PHONE

+212 522 438 222

+33 1 71 90 40 50

Key information

BRAND

CAT®

CONDITION

New

REFERENCE

BX06455

YEAR

2022

HOURS

10

LOCATION

VLISSINGEN, NL

VIN

LP901008

AVAILABILITY

Sold

COMPACTORS

CB13

Technical specifications

WEIGHT

OPERATING WEIGHT - STANDARD	12500 kg
-----------------------------	----------

STATIC LINEAR LOAD	34 kg/cm
--------------------	----------

MAXIMUM OPERATING WEIGHT	13150 kg
--------------------------	----------

OPERATING CHARACTERISTICS

STANDARD COMPACTION WIDTH	2000 mm
---------------------------	---------

CYLINDER OFFSET	170 mm
-----------------	--------

GROUND CLEARANCE	292 mm
------------------	--------

CURB CLEARANCE HEIGHT	723 mm
-----------------------	--------

ENGINE

ENGINE MODEL	C4.4 Cat
--------------	----------

GROSS POWER	106 kW
-------------	--------

TRAVEL SPEEDS

LOW	7 km/h
-----	--------

HIGH	13 km/h
------	---------

DIMENSIONS

OVERALL LENGTH	4740 mm
----------------	---------

COMPACTORS

CB13

Technical specifications

WHEELBASE	3450 mm
-----------	---------

HEIGHT - WITH ROPS/FOPS STRUCTURE	3068 mm
-----------------------------------	---------

OVERALL WIDTH	2325 mm
---------------	---------

VIBRATION SYSTEM

CENTRIFUGAL FORCE PER DRUM - MAXIMUM	110 kN
--------------------------------------	--------

CENTRIFUGAL FORCE PER DRUM - MINIMUM	34.7 kN
--------------------------------------	---------

MAXIMUM AMPLITUDE	0.96 mm
-------------------	---------

MINIMUM AMPLITUDE	0.3 mm
-------------------	--------

MAXIMUM FREQUENCY	63.3 Hz
-------------------	---------

MINIMUM FREQUENCY	42 Hz
-------------------	-------

MAINTENANCE CAPACITIES

FUEL TANK CAPACITY	250 l
--------------------	-------

WATER SPRAY TANK CAPACITY	1000 l
---------------------------	--------